1/7

FIG. 1

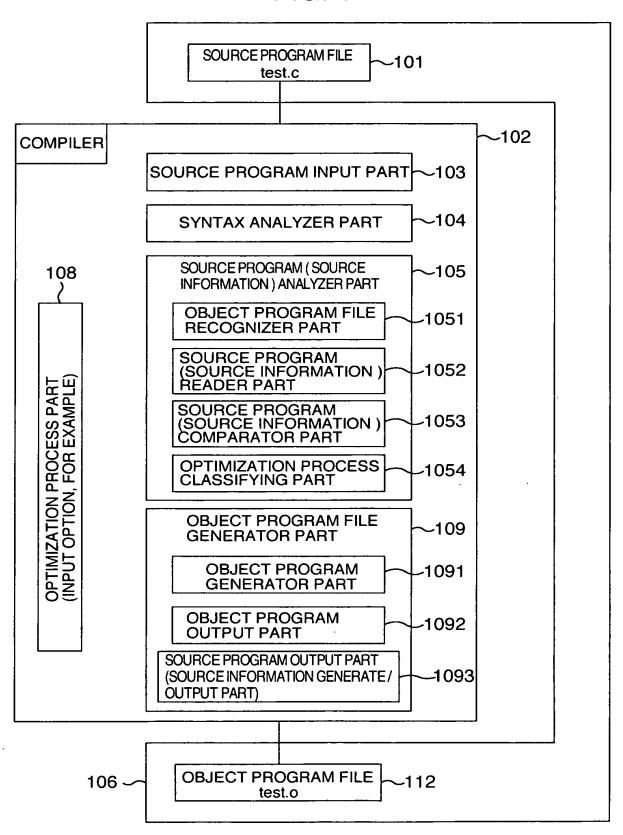


FIG. 2

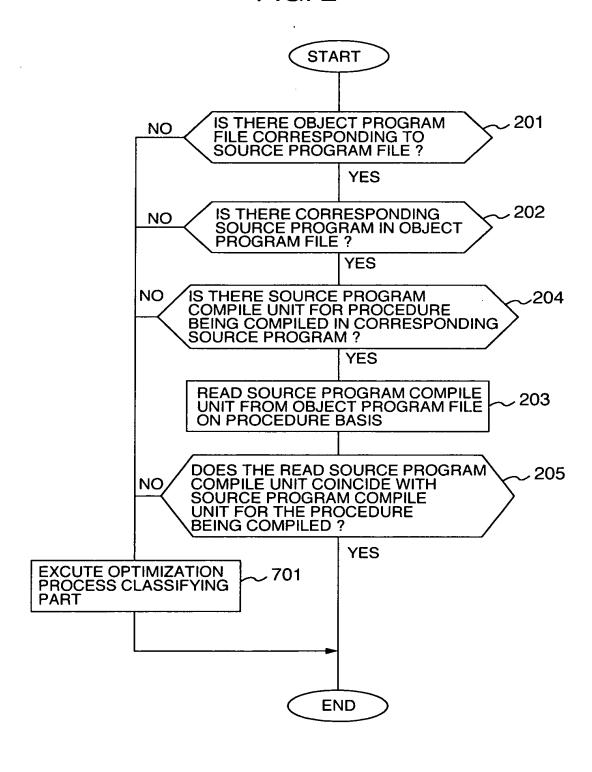


FIG. 3

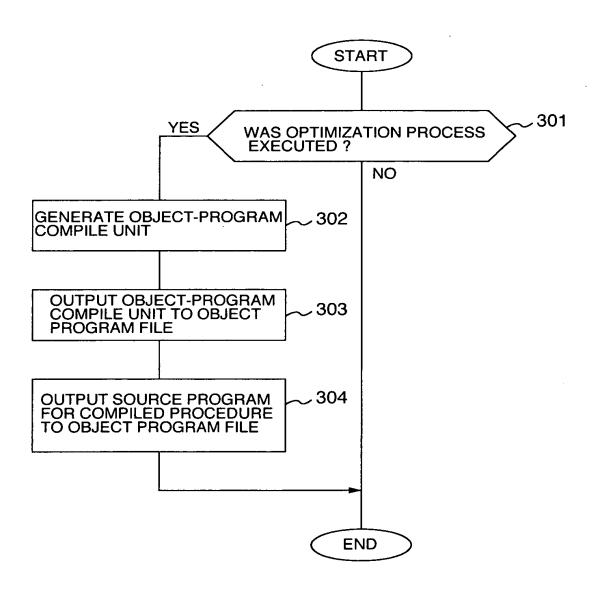


FIG. 4

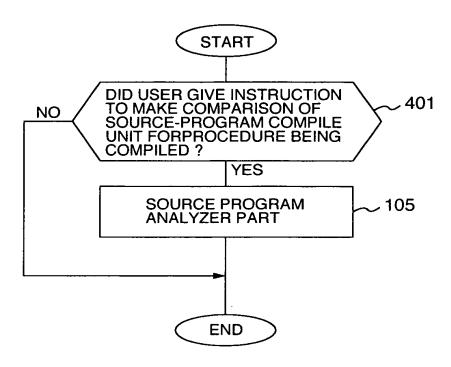


FIG. 5

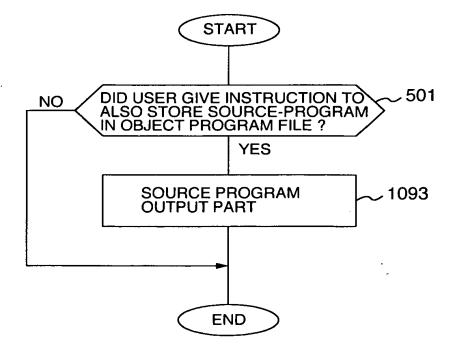


FIG. 6
OBJECT PROGRAM FILE

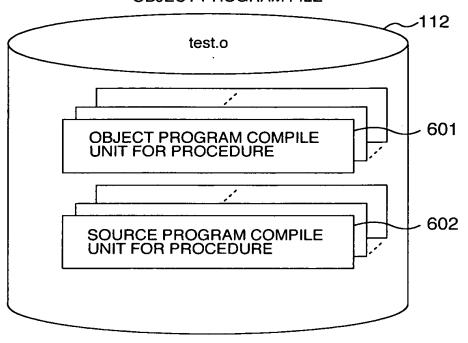


FIG. 7

SOURCE PROGRAM FILE test.c

```
func1 () {
    int i;
    i=100;
    printf ("%d\forall n", i);
    }
    func2 () {
    int j;
    j=50;
    printf ("\$d\forall n", j);
    }
```

FIG. 8

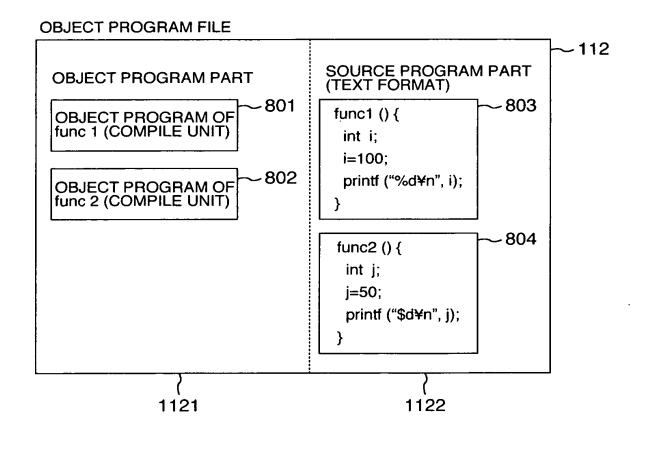


FIG. 9

